


TM.ONTEC S20 M1X 60/180 M/NM AT



Catalog number	TM-S2.MXATX060B
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	AT - auto-test / self-test
Colour	RAL9005
Luminous flux	371 (1h); 154 (3h) lm
Active power	3.8 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	5-40 °C
Material	PC
Appliance classes	2
IP	IP65/IK08
IK	IK08
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour



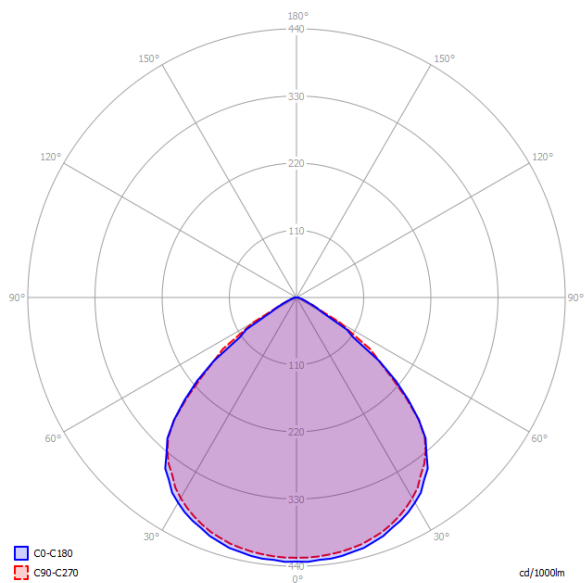

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

3,5 - 1h | 3,0 - 3h
3,5 - 1h | 3,5 - 3h
4,5 - 1h | 4,0 - 3h
5,0 - 1h | 4,0 - 3h
5,0 - 1h | 3,5 - 3h
5,0 - 1h | 3,5 - 3h
5,5 - 1h | 3,5 - 3h
5,5 - 1h | 3,5 - 3h
5,5 - 1h | 3,0 - 3h
5,5 - 1h | 2,0 - 3h

Distance fitting - fitting

8,0 - 1h | 7,0 - 3h
9,5 - 1h | 8,0 - 3h
11,5 - 1h | 9,5 - 3h
13,0 - 1h | 11,0 - 3h
15,0 - 1h | 12,5 - 3h
16,5 - 1h | 13,5 - 3h
18,0 - 1h | 14,0 - 3h
19,0 - 1h | 14,5 - 3h
20,0 - 1h | 15,0 - 3h

