


RGB

ruban-LED RGB 60/320/576 leds/m



CARACTÉRISTIQUES


- RGB60 SMD5050 60 leds/m
- RGB320 SMD2022 320 leds/m
- RGBDOT 576 leds/m - COB (dots-free)

UTILISATIONS


- éclairage d'ambiance indirect à couleurs réglables



RGB60



RGB320



RGBDOT



ARTICLE	IP	CCT	CRI	LM/M	WATT/M	VOLT	LONGUEUR m	€ HTVA
RGB60IP20	20	RGB	-	R160/G400/B100	14,4	24	5	93,59
RGB320IP20	20	RGB	-	R160/G400/B100	14,4	24	5	113,12
RGBDOTIP20	20	RGB	-	R80/G380/B70	14	24	5	116,98
RGB60IP67	67	RGB	-	R160/G400/B100	14,4	24	5	135,79
RGB320IP67	67	RGB	-	R160/G400/B100	14,4	24	5	144,16

RGBW

ruban-LED RGB+W - 784 leds/m (dot-free) - CRI>90




CARACTÉRISTIQUES

- pas de points visibles
- 784 leds/m - COB
- CRI>90

UTILISATIONS

- éclairage d'ambiance direct à couleurs réglables

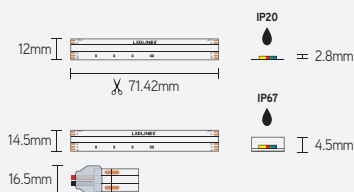

ARTICLE	IP	CCT	CRI	LM/M	WATT/M	VOLT	LONGUEUR m	€ HTVA
RGBW27DOTIP20	20	RGB+2700	>90	R96/G483/B70/W317	14	24	5	137,94
RGBW30DOTIP20	20	RGB+3000	>90	R96/G483/B70/W317	14	24	5	137,94
RGBW40DOTIP20	20	RGB+4000	>90	R96/G483/B70/W317	14	24	5	137,94
RGBW27DOTIP67	67	RGB+2700	>90	R96/G483/B70/W317	14	24	5	173,18
RGBW30DOTIP67	67	RGB+3000	>90	R96/G483/B70/W317	14	24	5	173,18
RGBW40DOTIP67	67	RGB+4000	>90	R96/G483/B70/W317	14	24	5	173,18