

# ONTEC S M1 180 M AT

TM-OS.M1ATM860B




## PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP65
IK	IK08
Version	AT - auto-test / self-test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9005
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	3.3 W
Insulation class	2
Luminous flux	150 lm
Battery	LiFePO4/C 3.2V 1.5Ah
Dimming mode	no



## PHOTOMETRY [m]

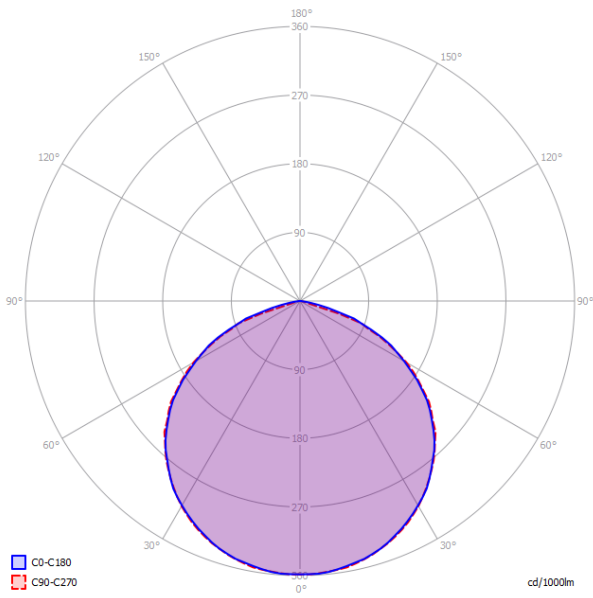

### Ceiling height

2,5  
3,0  
4,0  
5,0  
6,0  
7,0  
8,0  
9,0  
10,0

### Distance wall - fitting

3,0  
3,2  
3,4  
3,6  
3,6  
3,4  
3,0  
2,6  
2,4

### Distance fitting - fitting

8,3  
9,0  
10,3  
11,0  
11,8  
12,2  
12,0  
11,7  
11,5

