




IP67 plus

séries XLG & HLG

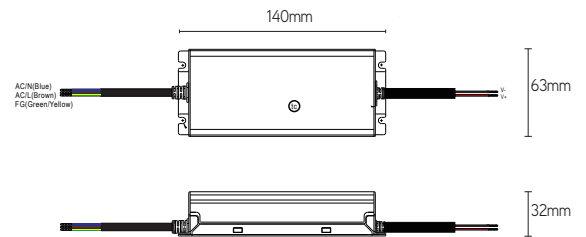

ARTICLE	V	W	IP	DIMENSIONS
XLG-75-24-A	24	75	67	140x63x32 mm
XLG-100-24-A	24	100	67	140x63x32 mm
XLG-150-24-A	24	150	67	180x63x35,5 mm
XLG-200-24-A	24	200	67	219x63x35,5 mm
HLG-40H-24A	24	40	67	171x61,5x36,8 mm
HLG-60H-24A	24	60	67	171x61,5x36,8 mm
HLG-80H-24A	24	80	67	195,6x61,5x38,8 mm
HLG-100H-24A	24	100	67	220x68x38,8 mm
HLG-120H-24A	24	120	67	220x68x38,8 mm
HLG-150H-24A	24	150	67	228x68x38,8 mm
HLG-185H-24A	24	185	67	228x68x38,8m m
HLG-240H-24A	24	240	67	251x68x38,8 mm
HLG-320H-24A	24	320	67	252x90x43,8 mm
HLG-480H-24A	24	480	67	262x125x43,8 mm
HLG-600H-24A	24	600	67	280x144x48,5 mm

CARACTÉRISTIQUES

- alimentation ruban led 24VDC
- protection contre les courts-circuits, les surcharges et les surtensions
- câble de raccordement de 30 cm
- 5 (XLG) ou 7 (HLG) ans de garantie
- non dimmable

APPLICATIONS

- convient pour les applications extérieures
- secteurs résidentiel, tertiaire et industriel