TM.ONTEC R M1
60 NM AT



Catalog number	TM-OR.M1ATN600W
Application	anti-panic lighting
Duration time	1 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	360 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	1.2 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LEDLifeTime	50

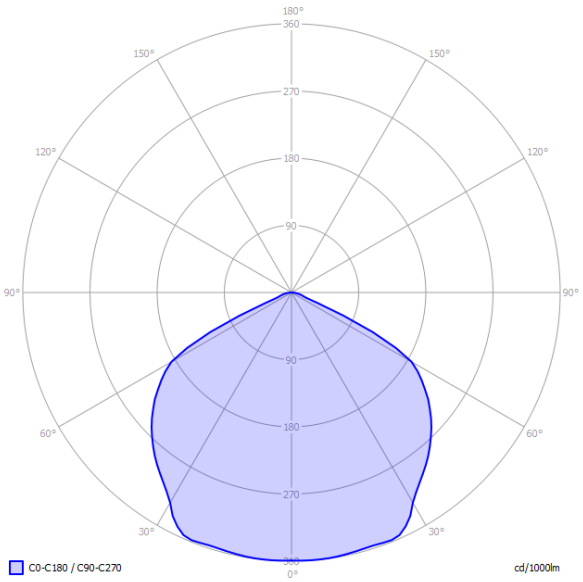

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,0	8,5
3,0	4,0	10,0
4,0	5,0	12,5
5,0	5,5	14,5
6,0	5,5	16,5
7,0	5,0	18,0
8,0	5,0	19,0
9,0	4,5	20,0
10,0	4,0	20,5